


22/1100 SOLAR

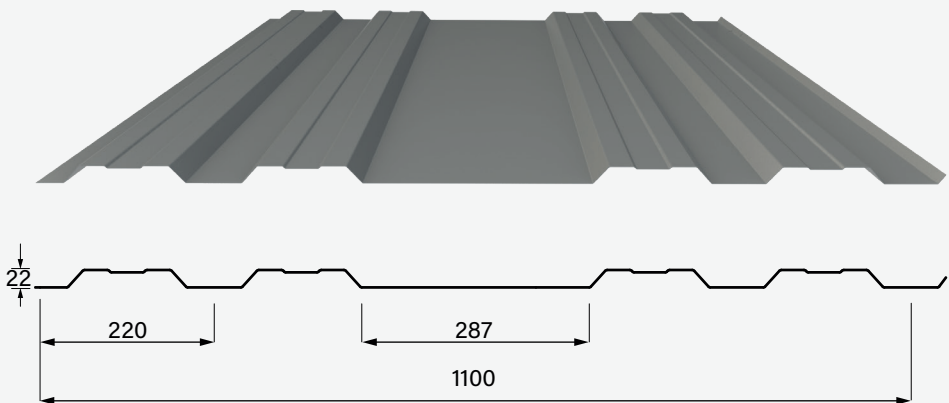

Technische eigenschappen

Profielplaattype	Staaldikte [mm]	Gewicht [kg/m ²]
22/1100 SOLAR	0,55	4,9
	0,63	5,6
	0,70	6,2
	0,75	6,7
	0,88	7,9
	1,00	8,9

Staalkwaliteit	S280GD, S320GD	
Coatings	Prisma® 65 (spec. coil)	
Afmetingen	Standaard	600 - 11.500
Lengte [mm]	Minimaal	700
	Maximaal	13.000
Verpakking	Max. aantal per pakket	75 stuks
	Max. gewicht per pakket	2.000 kg

Certificaten

CE

ISO 9001

QUALITY ASSURANCE MANAGEMENT

ISO 14001

ENVIRONMENTAL MANAGEMENT

BES 6001

Responsible Sourcing

Maximale overspanning Max. - mm