
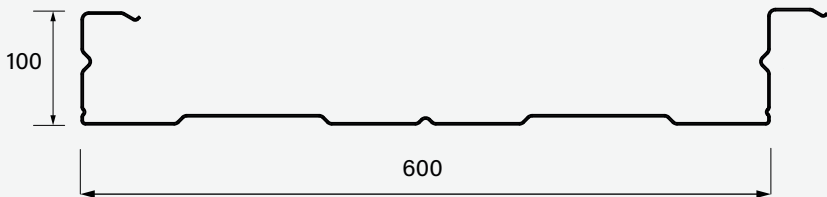


# 100/600

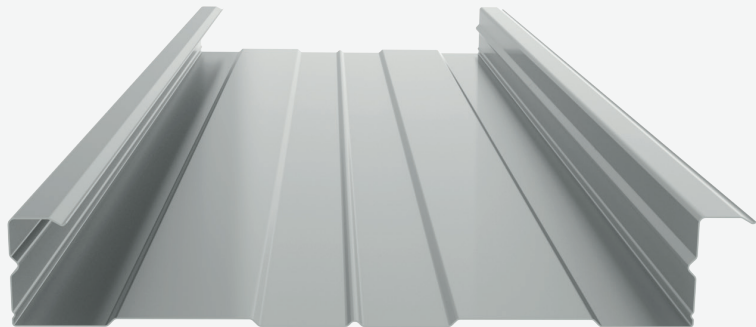

## Technische eigenschappen

| Profielplaattype | Staaldikte [mm] | Gewicht [kg/m <sup>2</sup> ] | I <sub>eff</sub> [cm <sup>4</sup> /m] | Gewicht Perfo[kg/m <sup>2</sup> ] | I <sub>eff</sub> [cm <sup>4</sup> /m] |
|------------------|-----------------|------------------------------|---------------------------------------|-----------------------------------|---------------------------------------|
| 100/600          | 0,75            | 9                            | 91                                    | 7,5                               | 65                                    |
|                  | 0,88            | 10,6                         | 126                                   | 8,8                               | 81                                    |
|                  | 1,00            | 11,9                         | 141                                   | 9,9                               | 96                                    |
|                  | 1,25            | 14,8                         | 177                                   | 12,3                              | 121                                   |
|                  | 1,50            | 17,8                         | 214                                   | 14,8                              | 146                                   |

**Staalkwaliteit** S320GD  
**Coatings** Verzinkt Z275  
**Optioneel** Geperforeerd

**Afmetingen** Standaard 1.800 - 15.000  
**Lengte [mm]** Minimaal 1.800  
Maximaal 22.000

**Verpakking** Max. aantal per pakket 22 stuks  
Max. gewicht per pakket - kg

**Certificaten**

