
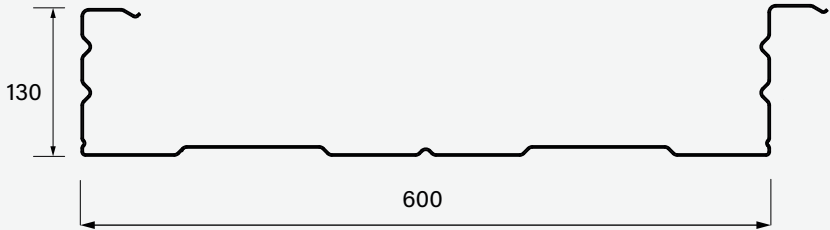


# 130/600

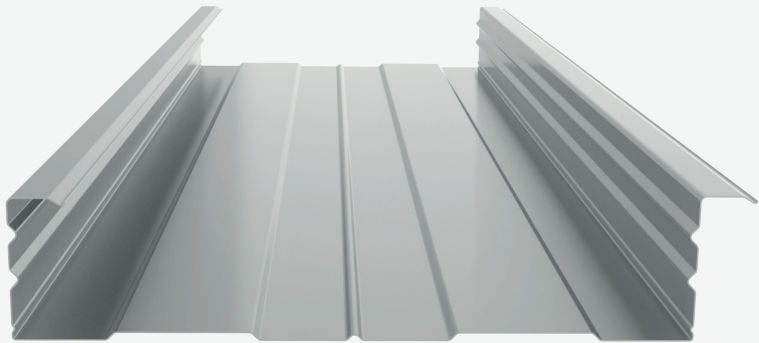

## Technische eigenschappen

| Profielplaattype | Staaldikte [mm] | Gewicht [kg/m <sup>2</sup> ] | I <sub>eff</sub> [cm <sup>4</sup> /m] | Gewicht Perfo[kg/m <sup>2</sup> ] | I <sub>eff</sub> [cm <sup>4</sup> /m] |
|------------------|-----------------|------------------------------|---------------------------------------|-----------------------------------|---------------------------------------|
| 130/600          | 0,75            | 9,6                          | 158,00                                | 8,1                               | 127                                   |
|                  | 0,88            | 11,3                         | 215,00                                | 9,5                               | 139                                   |
|                  | 1,00            | 12,5                         | 268,00                                | 10,5                              | 150                                   |
|                  | 1,25            | 15,6                         | 338,00                                | 13,1                              | 189                                   |
|                  | 1,50            | 18,7                         | 408,00                                | 15,7                              | 228                                   |

**Staalkwaliteit** S320GD  
**Coatings** Verzinkt Z275  
**Optioneel** Geperforeerd

**Afmetingen** Standaard 1.800 - 15.000  
**Lengte [mm]** Minimaal 1.800  
Maximaal 22.000

**Verpakking** Max. aantal per pakket 18 stuks  
Max. gewicht per pakket - kg

**Certificaten**

